


WT080C(刺破型) Connector 0.8mm Pitch

WTB
0.8

WT080C(刺破型) Connector 0.8mm Pitch

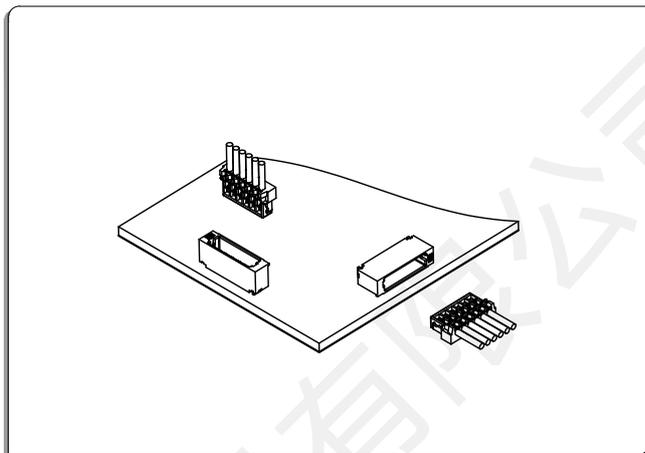


● 技术参数 SPECIFICATIONS


- 1、极数CKT: 2Pin to 25Pin
- 2、额定电流Current rating: 0.5A AC/DC
- 3、额定电压Voltage rating(max): 30V, AC/DC
- 4、工作温度Working Temperature: -25℃~+85℃, (含通电温度上升值)
(Including temperature rise in applying electrical current)
- 5、接触电阻Contact resistance: 初始Initial value $\leq 20m\Omega$
环境测试后After environmental testing $\leq 40m\Omega$
- 6、绝缘电阻Insulation resistance: $\geq 100M\Omega$
- 7、耐电压Withstand voltage: 200VAC(rms)
- 8、适用线规 Applicable wire: AWG #32 to #28
- 9、适用基板厚度Applicable PC board thickness: 1.6mm to 2.0mm

● 安装尺寸 Mounting Measurement

● 立式 Straight Angle

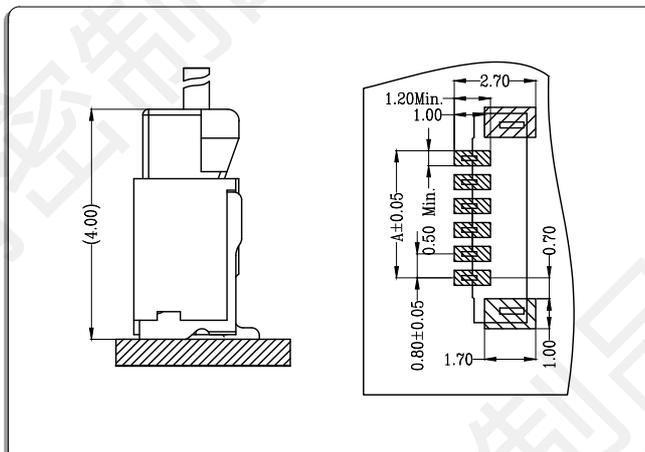


● 卧式 Right Angle

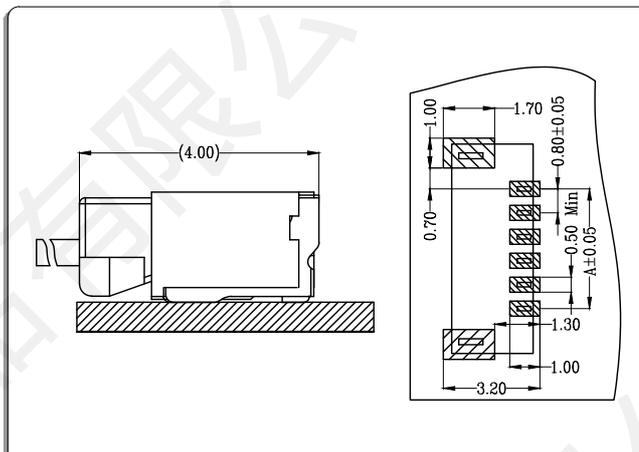

WT080C (刺破型) Connector 0.8mm Pitch

- 刺破型公头Insulation Displacement
- 材料与表面处理 Material and Finish:
Housing:Nylon 66 UL94V-0 & Terminal:phosphor bronze &
Finish:Tin-plated & Gold-plated

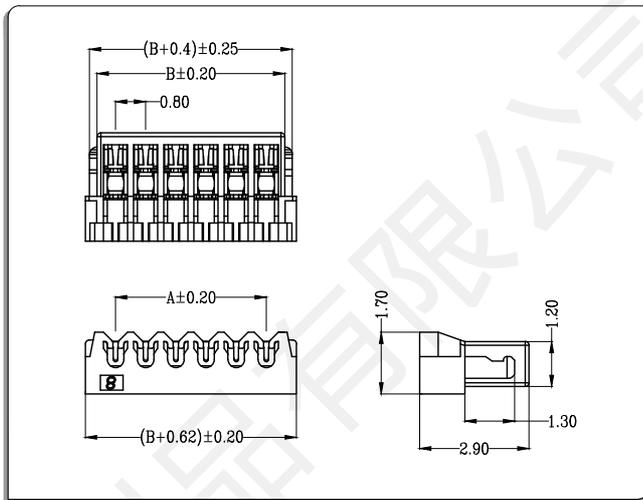

CKT	Part No	DIM A	DIM B
2	WT080C0-02	0.80	1.78
3	WT080C0-03	1.60	2.58
4	WT080C0-04	2.40	3.38
5	WT080C0-05	3.20	4.18
6	WT080C0-06	4.00	4.98
7	WT080C0-07	4.80	5.78
8	WT080C0-08	5.60	6.58
9	WT080C0-09	6.40	7.38
10	WT080C0-10	7.20	8.18
11	WT080C0-11	8.00	8.98
12	WT080C0-12	8.80	9.78
—	—	—	—
25	WT080C0-25	19.20	20.18

WTB
0.8

WT080C (刺破型) Connector 0.8mm Pitch