




WTJC25(JC25) Connector 2.5mm Pitch

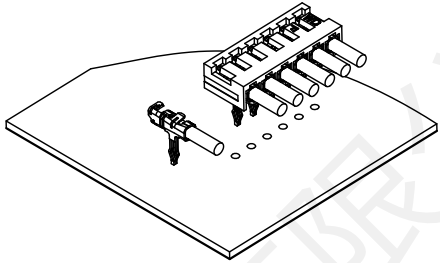

● 技术参数 SPECIFICATIONS



- 1、极数CKT: 2Pin to 16Pin
- 2、额定电流Current rating: 2.5A AC/DC
- 3、额定电压Voltage rating(max): 250V, AC/DC
- 4、工作温度Working Temperature: -25℃~+85℃, (含通电温度上升值)
(Including temperature rise in applying electrical current)
- 5、绝缘电阻Insulation resistance: $\geq 1000M\Omega$
- 6、耐电压Withstand voltage: 1000VAC(rms)
- 7、适用线规 Applicable wire: AWG #26 to #22
- 8、适用基板厚度Applicable PC board thickness: 1.6mm to 2.0mm

- 胶芯 Housing
- 材料Material: Nylon 66 UL94V-0

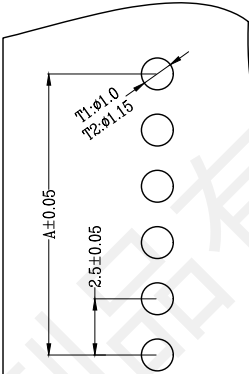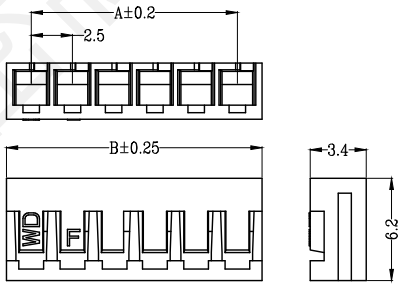


CKT	Part No	DIM A	DIM B
2	WTJC250-02	2.50	5.50
3	WTJC250-03	5.00	8.00
4	WTJC250-04	7.50	10.50
5	WTJC250-05	10.00	13.00
6	WTJC250-06	12.50	15.50
7	WTJC250-07	15.00	18.00
8	WTJC250-08	17.50	20.50
9	WTJC250-09	20.00	23.00
10	WTJC250-10	22.50	25.50
11	WTJC250-11	25.00	28.00
12	WTJC250-12	27.50	30.50
--	-- --	--	--
16	WTJC250-16	37.50	40.50


- 端子Terminal:T=0.2mm

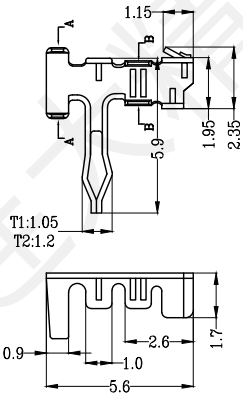

SEC:A-A




SEC:B-B



Part No.	Wire Range	Insulation O.D	Material	Finish
WTJC250-T0	AWG#26~#22	1.70mm MAX	phosphor bronze	Tin & Gold-plated

WTSCN25(SCN) Connector 2.5mm Pitch

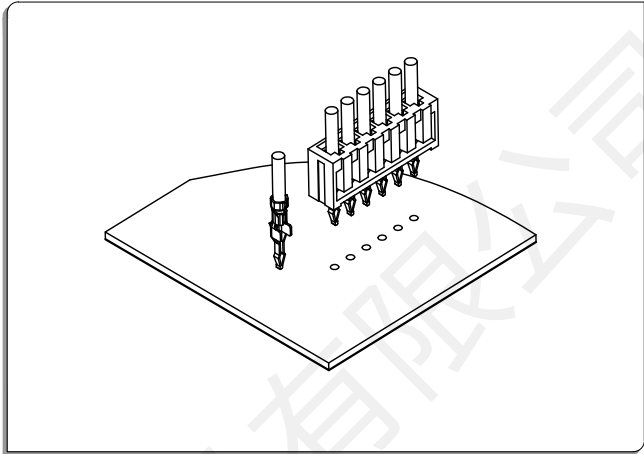


● 技术参数 SPECIFICATIONS

- 1、极数CKT: 2Pin to 16Pin
- 2、额定电流Current rating: 2.5A AC/DC
- 3、额定电压Voltage rating(max): 250V, AC/DC
- 4、工作温度Working Temperature: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$,
(含通电温度上升值)
(Including temperature rise in applying electrical current)
- 5、绝缘电阻Insulation resistance: $\geq 1000\text{M}\Omega$
- 6、耐电压Withstand voltage: 1000VAC(rms)
- 7、适用线规 Applicable wire: AWG #26 to #22
- 8、适用基板厚度Applicable PC board thickness: 1.6mm to 2.0mm


● 胶芯 Housing

- 材料Material: Nylon 66 UL94V-0

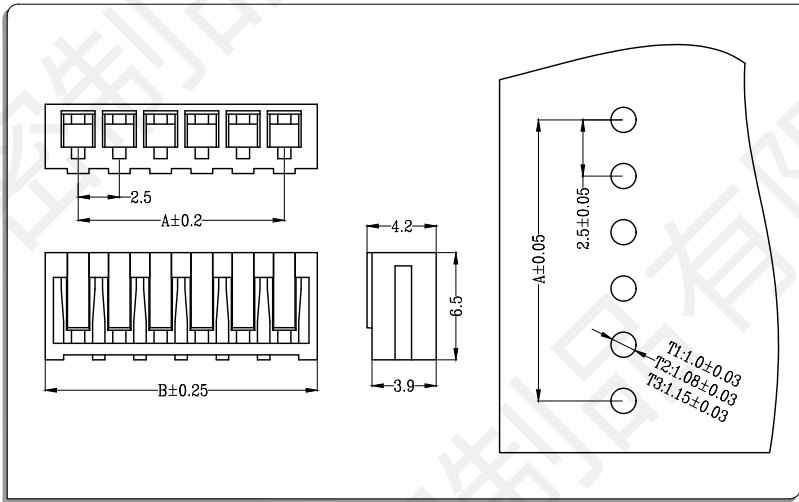

CKT	Part No	DIM A	DIM B
2	WTSCN25-02	2.50	6.50
3	WTSCN25-03	5.00	9.00
4	WTSCN25-04	7.50	11.50
5	WTSCN25-05	10.00	14.00
6	WTSCN25-06	12.50	16.50
7	WTSCN25-07	15.00	19.00
8	WTSCN25-08	17.50	21.50
9	WTSCN25-09	20.00	24.00
10	WTSCN25-10	22.50	26.50
11	WTSCN25-11	25.00	29.00
12	WTSCN25-12	27.50	31.50
—	—	—	—
16	WTSCN25-16	37.50	41.50

● 端子Terminal:T=0.2mm

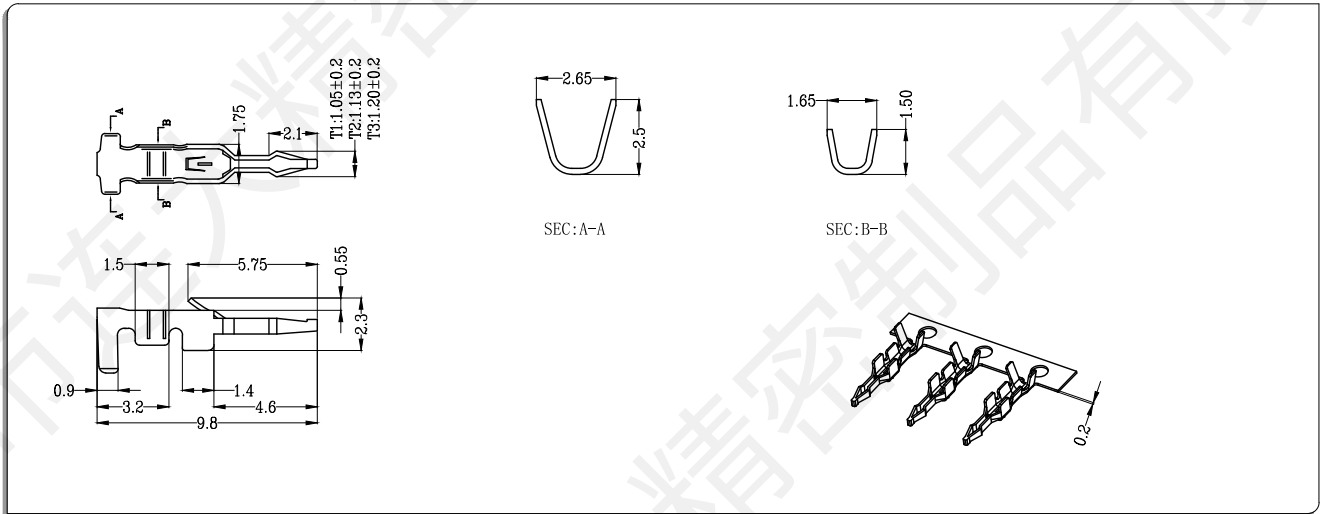

Part No.	Wire Range	Insulation O.D	Material	Finish
WTSCN25-T0	AWG#26~#22	1.70mm MAX	phosphor bronze	Tin & Gold-plated

WTB
2.5

WTSCN25(SCN) Connector 2.5mm Pitch